


Contact our Sales on 08707 66 49 11

COLLATED DRYWALL SCREWS



PRODUCT RANGE - COARSE THREAD DRYWALL SCREWS - BLACK PHOSPHATE

Product Code	Description	Diameter (mm)	Box Qty	Carton Qty	Pallet Qty
CDWCP25	Collated Drywall Screw Coarse Thread - Black 25mm	3.5	1,000	10,000	240,000
CDWCP32	Collated Drywall Screw Coarse Thread - Black 32mm	3.5	1,000	10,000	240,000
CDWCP35	Collated Drywall Screw Coarse Thread - Black 35mm	3.5	1,000	10,000	240,000
CDWCP38	Collated Drywall Screw Coarse Thread - Black 38mm	3.5	1,000	10,000	240,000
CDWCP42	Collated Drywall Screw Coarse Thread - Black 42mm	3.5	1,000	10,000	240,000
CDWCP45	Collated Drywall Screw Coarse Thread - Black 45mm	3.5	1,000	10,000	240,000
CDWCP50	Collated Drywall Screw Coarse Thread - Black 50mm	3.5	1,000	10,000	240,000
CDWCP55	Collated Drywall Screw Coarse Thread - Black 55mm	3.5	1,000	10,000	160,000
CDWCP65	Collated Drywall Screw Coarse Thread - Black 65mm	4.2	500	5,000	160,000
CDWCP75	Collated Drywall Screw Coarse Thread - Black 75mm	4.2	500	5,000	160,000

PRODUCT RANGE - FINE THREAD COLLATED DRYWALL SCREWS - BLACK PHOSPHATE

Product Code	Description	Diameter (mm)	Max Board Thickness (mm)	Steel Thickness (mm)	Box Qty	Carton Qty
CDWFP25	Collated Drywall Screw Fine Thread - Black 25mm	3.5	15	0.45-0.9	1,000	10,000
CDWFP35	Collated Drywall Screw Fine Thread - Black 35mm	3.5	25	0.45-0.9	1,000	10,000
CDWFP45	Collated Drywall Screw Fine Thread - Black 45mm	3.5	35	0.45-0.9	1,000	10,000
CDWFP55	Collated Drywall Screw Fine Thread - Black 55mm	3.5	45	0.45-0.9	1,000	10,000

PRODUCT RANGE - FINE THREAD COLLATED DRYWALL SCREWS - ZINC

Product Code	Description	Diameter (mm)	Max Board Thickness (mm)	Steel Thickness (mm)	Box Qty	Carton Qty
CDWFZ25	Collated Drywall Screw Fine Thread - Zinc 25mm	3.5	15	0.45-0.9	1,000	10,000
CDWFZ32	Collated Drywall Screw Fine Thread - Zinc 32mm	3.5	22	0.45-0.9	1,000	10,000
CDWFZ35	Collated Drywall Screw Fine Thread - Zinc 35mm	3.5	25	0.45-0.9	1,000	10,000
CDWFZ42	Collated Drywall Screw Fine Thread - Zinc 42mm	3.5	30	0.45-0.9	1,000	10,000
CDWFZ45	Collated Drywall Screw Fine Thread - Zinc 45mm	3.5	35	0.45-0.9	1,000	10,000
CDWFZ50	Collated Drywall Screw Fine Thread - Zinc 50mm	3.5	40	0.45-0.9	1,000	10,000
CDWFZ55	Collated Drywall Screw Fine Thread - Zinc 55mm	3.5	45	0.45-0.9	1,000	10,000
CDWFZ75	Collated Drywall Screw Fine Thread - Zinc 75mm	4.2	65	0.45-0.9	500	5,000



Contact our Sales on 08707 66 49 11

APPLICATION

- Coarse Thread designed for fixing plasterboard to timber studs
- Fine Thread designed for fixing plasterboard to metal studs of 20–25 gauge (0.55mm – 0.9mm)

MATERIALS & COATINGS

- Black Phosphate range – C1022 or C1018 Steel with Black Phosphate coating
- Zinc range – C1022 or C1018 Steel with Bright Zinc Plating

PRODUCT FEATURES & BENEFITS

- Evolution premium collated screws provide superior fixing of boards to timber or metal studs
- 100% true actuation in all popular brands of collated screw guns
- Evolution collation consistency eliminates tool jamming



COLLATED SELF-DRILLING DRYWALL SCREWS

PRODUCT RANGE

Product Code	Description	Build-Up Range (mm)	Diameter (mm)	Max Board Thickness (mm)	Steel Thickness (mm)	Box Qty	Carton Qty
CDWFDZ25	Collated Drywall Screw Self-Drilling - Zinc 25mm	PH2	3.5	15	0.8-2.5	1,000	10,000
CDWFDZ35	Collated Drywall Screw Self-Drilling - Zinc 35mm	PH2	3.5	20	0.8-2.5	1,000	10,000
CDWFDZ50	Collated Drywall Screw Self-Drilling - Zinc 50mm	PH2	3.5	35	0.8-2.5	1,000	10,000



APPLICATION

- Designed for fixing plasterboard to heavier gauge drywall track section up to 2.5mm

MATERIALS & COATINGS

- C1022 or C1018 Steel with Bright Zinc Plating

PRODUCT FEATURES & BENEFITS

- Evolution premium collated screws provide superior fixing of boards to heavier gauge metal studs
- 100% true actuation in all popular brands of collated screw guns
- Evolution collation consistency eliminates tool jamming

COLLATED FLOORING SCREWS

PRODUCT RANGE

Product Code	Description	Build-Up Range (mm)	Diameter (mm)	Box Quantity	Carton Quantity	Pallet Quantity
CFSCY45	Collated Flooring Screw Yellow Passivated 45mm	PH2	4.2	1,000	10,000	240,000
CFSCY55	Collated Flooring Screw Yellow Passivated 55mm	PH2	4.2	1,000	10,000	240,000

CFT110	Collated Flooring Tool
--------	------------------------



APPLICATION

- For fastening of flooring materials to timber

MATERIALS & COATINGS

- Steel with Zinc and yellow passive coating

PRODUCT FEATURES & BENEFITS

- Evolution 'Split' threadform design prevents 'jacking' of the material being fixed down

- Self-countersinking nibs under the head of the screws to ensure a flush finish in all material
- Thread design ensures rapid pull-down
- Evolution premium collated flooring screws provide superior fixing of flooring materials to timber
- 100% true actuation in all popular brands of collated screw guns
- Evolution collation consistency eliminates jamming



Contact our Sales on 08707 66 49 11

COLLATED WING DRILL SCREWS



PRODUCT RANGE

Product Code	Description	Drive	Diameter (mm)	Fixture Thickness (mm)	Steel Thickness (mm)	Box Qty	Carton Qty
CTTS38	Collated Wing Drill Screw 38mm	R2 Square	4.8	6-22	1.2-3.5	500	5,000
CTTS45	Collated Wing Drill Screw 45mm	R2 Square	4.8	10-27	1.2-3.5	500	5,000
CTTS55	Collated Wing Drill Screw 55mm	R2 Square	5.5	13-35	1.2-3.5	500	5,000
CTTS62	Collated Wing Drill Screw 62mm	R2 Square	5.5	13-40	1.2-3.5	500	5,000

COLLATED WOOD SCREWS

PRODUCT RANGE - COLLATED TWINFAST SELF-COUNTERSINKING WOOD SCREWS

Product Code	Description	Drive	Diameter (mm)	Box Qty	Carton Qty	Pallet Qty
CWZ25	Collated Woodscrew Zinc 25mm	PH2	4.2	1,000	6,000	240,000
CWZ32	Collated Woodscrew Zinc 32mm	PH2	4.2	1,000	6,000	240,000
CWZ38	Collated Woodscrew Zinc 38mm	PH2	4.2	1,000	6,000	240,000
CWZ45	Collated Woodscrew Zinc 45mm	PH2	4.2	1,000	6,000	240,000
CWZ50	Collated Woodscrew Zinc 50mm	PH2	4.2	1,000	6,000	240,000

COLLATED DECKING SCREWS

PRODUCT RANGE - COLLATED DECKING SCREWS SQUARE DRIVE (1,000 HOURS COATING)

Product Code	Description	Drive	Diameter (mm)	Box Qty	Carton Qty	Pallet Qty
CDSFHC50	Collated Decking Screw 50mm	R2 Square	4.2	1,000	6,000	144,000
CDSFHC63	Collated Decking Screw 63mm	R2 Square	4.2	1,000	6,000	144,000

evolution Contact our Sales on 08707 66 49 11

TEK SCREWS - HEAD FOR COLD ROLLED STEEL 1.2mm - 3.5mm

PRODUCT RANGE



Product Code	Description	Effective Thread Length (mm)	Drill Point	Head Style	Box Qty	Carton Qty
TSHW4.8-16-3	4.8 x 16mm Tek Screw Hexagon Washer Head	6	Tek 3	5/16" Hex	500	4,000
TSHW5.5-25-3	5.5 x 25mm Tek Screw Hexagon Washer Head	8	Tek 3	5/16" Hex	500	4,000
TSHW5.5-32-3	5.5 x 32mm Tek Screw Hexagon Washer Head	21	Tek 3	5/16" Hex	200	4,800
TSHW5.5-38-3	5.5 x 38mm Tek Screw Hexagon Washer Head	27	Tek 3	5/16" Hex	200	4,800
TSHW5.5-50-3	5.5 x 50mm Tek Screw Hexagon Washer Head	42	Tek 3	5/16" Hex	200	3,200
TSHW5.5-62-3	5.5 x 62mm Tek Screw Hexagon Washer Head	51	Tek 3	5/16" Hex	200	3,200
TSHW5.5-75-3	5.5 x 75mm Tek Screw Hexagon Washer Head	65	Tek 3	5/16" Hex	100	1,400
TSHW5.5-100-3	5.5 x 100mm Tek Screw Hexagon Washer Head	90	Tek 3	5/16" Hex	100	1,400

TEK SCREWS - HEX HEAD FOR HOT ROLLED STEEL 4.0mm - 12.5mm

PRODUCT RANGE



Product Code	Description	Effective Thread Length (mm)	Drill Point	Head Style	Box Qty	Carton Qty
TSHW5.5-32-5	5.5 x 32mm Tek Screw Hexagon Washer Head	12	Tek 5	5/16" Hex	200	4,800
TSHW5.5-38-5	5.5 x 38mm Tek Screw Hexagon Washer Head	18	Tek 5	5/16" Hex	200	4,800
TSHW5.5-50-5	5.5 x 50mm Tek Screw Hexagon Washer Head	30	Tek 5	5/16" Hex	200	3,200
TSHW5.5-75-5	5.5 x 75mm Tek Screw Hexagon Washer Head	55	Tek 5	5/16" Hex	100	1,400
TSHW5.5-100-5	5.5 x 100mm Tek Screw Hexagon Washer Head	80	Tek 5	5/16" Hex	100	1,400

PRODUCT FEATURES & BENEFITS

- Excellent pull-over performance
- Evolution Self-Drill technology ensures both high-speed drilling and tapping, giving minimum operator fatigue
- Evolution thread configuration ensures a tight fixing every time

MATERIALS

- Case hardened Carbon Steel C1022 grade

COATING

- Silver Ruspert – 500 hours Salt Spray rating
- Paintable
- Thickness – 3μ

Manufactured in accordance with BS EN ISO 9000: 2000

DRILL POINT CAPABILITIES

TEK 1



up to 1.5mm

TEK 3



1.2mm to 3.5mm

TEK 5




4.00mm to 12.5mm


Contact our Sales on 08707 66 49 11

TEK SCREWS - METAL FRAMING APPLICATIONS

PRODUCT RANGE




Product Code	Description	Drive	Head Style	Steel Thickness (mm)	Box Qty	Carton Qty
TSPH4.8-16-3	4.8 x 16mm Tek Screw Pancake Head	PH2	Pancake	1.5 – 3.5	500	12,000
TSPH5.5-25-3	5.5 x 25mm Tek Screw Pancake Head	PH2	Pancake	1.5 – 3.5	200	4,800



TSLP4.8-22-2	4.8 x 22mm Low Profile Wafer Head	PH3	Pancake	1.2 – 3.0	500	12,000
TSLP5.5-38-5	5.5 x 38mm Low Profile Wafer Head	PH3	Pancake	4.0 – 12.0	200	2,800

TEK SCREWS - HEX HEAD WITH BONDED EPDM WASHER

PRODUCT RANGE - TEK 3 DRILL POINT



Product Code	Description	Effective Thread Length (mm)	Washer ϕ (mm)	Head Style (washed)	Box Qty	Carton Qty
TSBW5.5-26-3	5.5 x 26mm Tek Screw Bonded Hex Washer Head	10	16	5/16" Hex	250	3,200
TSBW5.5-32-3	5.5 x 32mm Tek Screw Bonded Hex Washer Head	11	16	5/16" Hex	200	3,200
TSBW5.5-38-3	5.5 x 38mm Tek Screw Bonded Hex Washer Head	19	16	5/16" Hex	200	2,400
TSBW5.5-50-3	5.5 x 50mm Tek Screw Bonded Hex Washer Head	31	16	5/16" Hex	100	2,400
TSBW5.5-60-3	5.5 x 60mm Tek Screw Bonded Hex Washer Head	41	16	5/16" Hex	100	1,600
TSBW5.5-75-3	5.5 x 75mm Tek Screw Bonded Hex Washer Head	55	16	5/16" Hex	100	1,400
TSBW5.5-100-3	5.5 x 100mm Tek Screw Bonded Hex Washer Head	80	16	5/16" Hex	100	1,400

PRODUCT RANGE - TEK 5 DRILL POINT

Product Code	Description	Effective Thread Length (mm)	Washer ϕ (mm)	Head Style (washed)	Box Qty	Carton Qty
TSBW5.5-38-5	5.5 x 38mm Tek Screw Bonded Hex Washer Head	16	16	5/16" Hex	100	2,400
TSBW5.5-50-5	5.5 x 50mm Tek Screw Bonded Hex Washer Head	30	16	5/16" Hex	100	1,400
TSBW5.5-60-5	5.5 x 60mm Tek Screw Bonded Hex Washer Head	40	16	5/16" Hex	100	1,400
TSBW5.5-70-5	5.5 x 70mm Tek Screw Bonded Hex Washer Head	50	16	5/16" Hex	100	1,400
TSBW5.5-85-5	5.5 x 85mm Tek Screw Bonded Hex Washer Head	60	16	5/16" Hex	100	1,400
TSBW5.5-100-5	5.5 x 100mm Tek Screw Bonded Hex Washer Head	80	16	5/16" Hex	100	1,400

PRODUCT RANGE - REDUCED DIAMETER DRILL POINT

Product Code	Description	Effective Thread Length (mm)	Washer ϕ (mm)	Head Style (washed)	Box Qty	Carton Qty
TSBWT5.5-32-1	5.5 x 32mm Tek Screw Bonded Hex Washer Head	16	16	5/16" Hex	100	2,400
TSBWT5.5-45-1	5.5 x 45mm Tek Screw Bonded Hex Washer Head	30	16	5/16" Hex	100	1,400

evolution **Contact our Sales on 08707 66 49 11**

TEK SCREWS - COMPOSITE PANEL FASTENER WITH BONDED EPDM WASHER



PRODUCT RANGE

Product Code	Description	Build-up Range (mm)	Drill Point	Head Style	Washer o (mm)	Box Qty	Carton Qty
TSBWHT5.5-60-3	5.5/6.3 x 60mm Tek Screw High Thread Bonded Hex Washer Head	23 - 40	Tek 3 Washered	5/16" Hex	16	100	1,400
TSBWHT5.5-80-3	5.5/6.3 x 80mm Tek Screw High Thread Bonded Hex Washer Head	23 - 60	Tek 3 Washered	5/16" Hex	16	100	1,400

MATERIALS

- Case hardened Carbon Steel C1022 grade (**Manufactured in accordance with BS EN ISO 9000 : 2000**)

COATING

- Silver Ruspert – 500 hours Salt Spray rating
- Paintable
- Thickness - 3 μ

TEK SCREWS - FLANGE HEAD WITH BONDED EPDM WASHER

PRODUCT RANGE

Product Code	Description	Drill Point	Head Style	Box Qty	Carton Qty
TSFHR4.8-16-2	4.8 x 16mm Flange Head with EPDM Washer	Tek 2	Flange	200	4,800
TSFHR6.3-20-1	6.3 x 20mm Flange Head with EPDM Washer	Tek 1	Flange	200	2,800
TSFHR8.0-25-1	8.0 x 25mm Flange Head with EPDM Washer	Tek 1	Flange	200	2,800

TEK SCREWS - ACCESSORIES

PRODUCT RANGE

Product Code	Description	Length (mm)	Box Quantity
DIBPH2	Screwdriver Insert Bit Phillips No2	25	100
DIBPH3	Screwdriver Insert Bit Phillips No3	25	100
MS5/16	Magnetic Drive Socket 5/16" AF x 42mm	42	10
MES5/16	Extended Magnetic Hex Drive Socket 5/16" AF x 65mm	65	10



Contact our Sales on 08707 66 49 11 **evolution**

WING DRILL TEK SCREWS



PRODUCT RANGE - TEK 3 AND TEK 5 DRILL POINT

Product Code	Description	Timber Thickness (mm)	Drill Point	Steel Thickness (mm)	Head Style	Box Qty	Carton Qty
TSTF4.2-38-3	Wing Drill Countersunk Tek Screw 4.2 x 38mm	6-22	Tek 3	1.2-3.5	P2 Csk Ribbed	200	4,800
TSTF4.8-45-3	Wing Drill Countersunk Tek Screw 4.8 x 45mm	10-27	Tek 3	1.2-3.5	P2 Csk Ribbed	200	3,200
TSTF5.5-50-3	Wing Drill Countersunk Tek Screw 5.5 x 50mm	13-30	Tek 3	1.2-3.5	P3 Csk Ribbed	200	3,200
TSTF5.5-62-3	Wing Drill Countersunk Tek Screw 5.5 x 62mm	13-40	Tek 3	1.2-3.5	P3 Csk Ribbed	200	3,200
TSTF5.5-80-3	Wing Drill Countersunk Tek Screw 5.5 x 80mm	25-60	Tek 3	1.2-3.5	P3 Csk	100	1,400
TSTF5.5-100-3	Wing Drill Countersunk Tek Screw 5.5 x 100mm	45-80	Tek 3	1.2-3.5	P3 Csk	100	1,400
TSTF5.5-120-3	Wing Drill Countersunk Tek Screw 5.5 x 120mm	45-100	Tek 3	1.2-3.5	P3 Csk	100	1,400
TSTF5.5-42-5	Wing Drill Countersunk Tek Screw 5.5 x 42mm	10-13	Tek 5	4.0-12.0	P3 Csk	100	4,000
TSTF5.5-65-5	Wing Drill Countersunk Tek Screw 5.5 x 65mm	10-28	Tek 5	4.0-12.0	P3 Csk	200	2,800
TSTF5.5-85-5	Wing Drill Countersunk Tek Screw 5.5 x 85mm	30-50	Tek 5	4.0-12.0	P3 Csk	100	1,400
TSTF5.5-100-5	Wing Drill Countersunk Tek Screw 5.5 x 100mm	45-65	Tek 5	4.0-12.0	P3 Csk	100	1,400

DESCRIPTION

- A case hardened, carbon steel self-drilling screw for fixing timber to steel - with 'wings' to drill clearance hole in timber

PRODUCT FEATURES & BENEFITS

- 'Wings' produce a clearance hole through timber to prevent 'jacking', breaking off as they hit the steel, giving a positive fix in thin and thick steel
- Countersunk head – smaller sizes have self-countersinking ribs under head to ensure a neat, flush finish
- Self-drilling – no need for pilot holes
- Easy to use Phillips recess countersunk heads
- 500 hours salt-spray rated Ruspert coating gives high corrosion resistance

MATERIALS

- Case hardened Carbon steel – C1022 grade


COATING

- Silver Ruspert – 500 hours Salt Spray rating
- Paintable
- Thickness – 3μ

INSTALLATION

- Simple through-fixing of timber and composites to steel
- Ensure that electric screwdriver is set to correct speed– 1,800 – 2,200rpm recommended
- Drill and drive in one operation

Screw is presented to timber

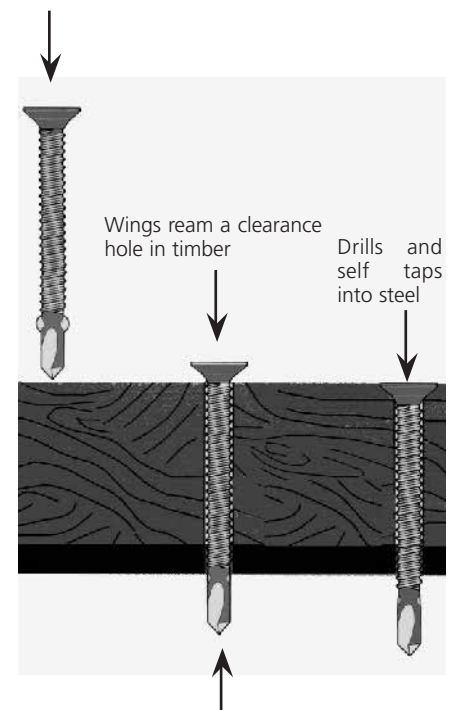

Wings break off when contact is made with steel

evolution Contact our Sales on 08707 66 49 11

DRYWALL SCREWS



PRODUCT RANGE - PREMIUM ZINC FINE THREAD

Product Code	Description	Diameter (mm)	Box Quantity	Carton Quantity	Pallet Quantity
DWSZ25	Drywall Screw Zinc 25mm	3.5	1,000	10,000	400,000
DWSZ32	Drywall Screw Zinc 32mm	3.5	1,000	10,000	270,000
DWSZ38	Drywall Screw Zinc 38mm	3.5	1,000	10,000	240,000
DWSZ42	Drywall Screw Zinc 42mm	3.5	1,000	10,000	240,000
DWSZ50	Drywall Screw Zinc 50mm	3.5	1,000	10,000	240,000
DWSZ65	Drywall Screw Zinc 65mm	4.2	500	5,000	120,000
DWSZ75	Drywall Screw Zinc 75mm	4.2	500	5,000	120,000
DWSZ90	Drywall Screw Zinc 90mm	4.8	500	3,000	81,000
DWSZ100	Drywall Screw Zinc 100mm	4.8	500	3,000	81,000
DWSZ125	Drywall Screw Zinc 125mm	4.8	250	2,500	60,000



WHDZ12	Wafer Head Screw Zinc 12mm	3.5	1,000	10,000	400,000
--------	----------------------------	-----	-------	--------	---------

PRODUCT RANGE - ECONOMY ZINC FINE THREAD

Product Code	Description	Diameter (mm)	Box Quantity	Carton Quantity	Pallet Quantity
P-DWSZ25	Drywall Screw Zinc 25mm	3.5	1,000	10,000	400,000
P-DWSZ32	Drywall Screw Zinc 32mm	3.5	1,000	10,000	270,000
P-DWSZ38	Drywall Screw Zinc 38mm	3.5	1,000	10,000	240,000
P-DWSZ42	Drywall Screw Zinc 42mm	3.5	1,000	10,000	240,000
P-DWSZ50	Drywall Screw Zinc 50mm	3.5	1,000	10,000	240,000
P-DWSZ65	Drywall Screw Zinc 65mm	4.2	500	5,000	120,000
P-DWSZ75	Drywall Screw Zinc 75mm	4.2	500	5,000	120,000

Contact our Sales on 08707 66 49 11

DRYWALL SCREWS

PRODUCT RANGE - BLACK PHOSPHATE FINE THREAD



Product Code	Description	Diameter (mm)	Box Quantity	Carton Quantity	Pallet Quantity
DWSP25	Drywall Screw Black Phosphate 25mm	3.5	1,000	10,000	400,000
DWSP32	Drywall Screw Black Phosphate 32mm	3.5	1,000	10,000	270,000
DWSP35	Drywall Screw Black Phosphate 35mm	3.5	1,000	10,000	270,000
DWSP38	Drywall Screw Black Phosphate 38mm	3.5	1,000	10,000	240,000
DWSP42	Drywall Screw Black Phosphate 42mm	3.5	1,000	10,000	240,000
DWSP45	Drywall Screw Black Phosphate 45mm	3.5	1,000	10,000	240,000
DWSP50	Drywall Screw Black Phosphate 50mm	3.5	1,000	10,000	240,000
DWSP55	Drywall Screw Black Phosphate 55mm	3.5	1,000	10,000	240,000
DWSP65	Drywall Screw Black Phosphate 65mm	4.2	500	5,000	120,000
DWSP70	Drywall Screw Black Phosphate 70mm	4.2	500	5,000	120,000
DWSP75	Drywall Screw Black Phosphate 75mm	4.2	500	5,000	120,000

APPLICATION

- Designed for fixing plasterboard to metal studs of 20 – 25 gauge (0.55mm – 0.9mm)

PRODUCT FEATURES & BENEFITS

- Manufactured from C1022 or C1018 grade Steel – premium quality
- Super sharp point dimples steel at point of contact providing wobble free and therefore quicker installation
- Thread configuration ensures clean, smooth, low torque installation for maximum holding power
- Bugle head design for application versatility gives a flush countersink with no paper tearing
- Deep Phillips recess reduces dropped or misaligned screws providing fast and efficient fastening
- ‘Stick Fix’ on Zinc range gives push fit onto Drywall Screwdriver bit
- Premium Screwdriver Insert bit provided in every box – in sealed bag at top of box
- Super strong packaging designed for easy stock-taking and less damage and wastage on site
- Manufactured to exceed ASTM C-1002-92 standards

MATERIALS & COATINGS

- Zinc range – C1022 or C1018 Steel with Bright Zinc Plating
- Black Phosphate range – C1022 or C1018 Steel with 48 hour Salt Spray tested Black Phosphate coating

evolution Contact our Sales on 08707 66 49 11

COARSE THREAD DRYWALL SCREWS

PRODUCT RANGE - BLACK PHOSPHATE COATING



Product Code	Description	Diameter (mm)	Box Quantity	Carton Quantity	Pallet Quantity
DWSC25	Drywall Screw Coarse Thread 25mm	3.5	1,000	10,000	400,000
DWSC32	Drywall Screw Coarse Thread 32mm	3.5	1,000	10,000	270,000
DWSC38	Drywall Screw Coarse Thread 38mm	3.5	1,000	10,000	240,000
DWSC42	Drywall Screw Coarse Thread 42mm	3.5	1,000	10,000	240,000
DWSC50	Drywall Screw Coarse Thread 50mm	3.5	1,000	10,000	240,000
DWSC65	Drywall Screw Coarse Thread 65mm	4.2	500	5,000	120,000
DWSC75	Drywall Screw Coarse Thread 75mm	4.2	500	5,000	120,000

PRODUCT RANGE - ZINC PLATED



Product Code	Description	Diameter (mm)	Box Quantity	Carton Quantity	Pallet Quantity
DWSCZ25	Drywall Screw Coarse Thread Zinc 25mm	3.5	1,000	10,000	400,000
DWSCZ32	Drywall Screw Coarse Thread Zinc 32mm	3.5	1,000	10,000	270,000
DWSCZ38	Drywall Screw Coarse Thread Zinc 38mm	3.5	1,000	10,000	240,000
DWSCZ42	Drywall Screw Coarse Thread Zinc 42mm	3.5	1,000	10,000	240,000
DWSCZ50	Drywall Screw Coarse Thread Zinc 50mm	3.5	1,000	10,000	240,000
DWSCZ65	Drywall Screw Coarse Thread Zinc 65mm	4.2	500	5,000	120,000
DWSCZ75	Drywall Screw Coarse Thread Zinc 75mm	4.2	500	5,000	120,000

APPLICATION

- Designed for fixing plasterboard to timber studs

PRODUCT FEATURES AND BENEFITS

- Super sharp 'S' point providing wobble free and therefore quicker installation
- Coarse Thread screws have 9 threads per inch to give greater 'grab' in timber, as opposed to the standard drywall screws which have 17 threads per inch
- Deeper thread diameter of 3.65 – 3.85 mm to give greater hold in timber
- Bugle head design for application versatility gives a flush countersink with no paper tearing
- Deep Phillips recess reduces dropped or misaligned screws providing fast and efficient fastening
- 'Stick Fit' gives push fit onto Drywall Screwdriver bit
- Screwdriver Insert bit provided in every box – in sealed bag at top of box
- Super strong packaging designed for easy stock-taking and less damage and wastage on site



- Manufactured to exceed ASTM C-1002-92 standards

MATERIALS & COATINGS

- C1018 Steel with 48 hour Salt Spray tested Black Phosphate coating

WHY SHOULD I USE COARSE SCREWS?

- Fine thread screws have diminished holding power as wood dries. Our Coarse Thread Drywall Screws have fewer threads, require fewer revolutions therefore giving a faster installation time. They have deeper threads to give superior holding power
- Fibres are pulled up during installation. As wood dries, the natural tendency of wood fibres are to spring back to their original position. Wood pulls the screws inwards, eliminating 'head pops'.



Contact our Sales on 08707 66 49 11

SELF-DRILLING DRYWALL SCREWS



PRODUCT RANGE - BUGLE HEAD ZINC COATED

Product Code	Description	Diameter (mm)	Box Quantity	Carton Quantity	Pallet Quantity
DWSDZ25	Drywall Screw Self Drill 25mm	3.5	1,000	10,000	400,000
DWSDZ32	Drywall Screw Self Drill 32mm	3.5	1,000	10,000	270,000
DWSDZ38	Drywall Screw Self Drill 38mm	3.5	1,000	10,000	240,000
DWSDZ42	Drywall Screw Self Drill 42mm	3.5	1,000	10,000	240,000
DWSDZ50	Drywall Screw Self Drill 50mm	3.5	1,000	10,000	240,000
DWSDZ65	Drywall Screw Self Drill 65mm	4.2	500	5,000	120,000
DWSDZ75	Drywall Screw Self Drill 75mm	4.2	500	5,000	120,000

APPLICATION

- Designed for fixing plasterboard to heavier gauge metal section up to 2.5mm

PRODUCT FEATURES AND BENEFITS

- Self Drill point recommended for use on metal section up to 2.5mm, giving fast and consistent drilling times
- Thread configuration ensures clean, smooth, low-torque installation – fully formed for maximum holding power
- Bugle head design for application versatility gives a flush countersink with no paper tearing
- Deep Phillips recess reduces dropped or misaligned screws providing fast and efficient fastening
- 'Stick Fit' gives push fit onto Drywall Screwdriver bit which reduces dropped or misaligned screws – less wastage
- Screwdriver Insert bit provided in every box – in sealed bag at top of box
- Super strong packaging designed for easy stock-taking and less damage and wastage on site
- Manufactured to exceed ASTM C-1002-92 standards

MATERIALS & COATINGS

- Steel C1022 with Electro-plated Zinc to 3μ



PRODUCT RANGE - WAFER HEAD

WHSDZ12	Wafer Head Self Drill Screw 12mm	4.2	1,000	10,000	400,000
WHSDZ25	Wafer Head Self Drill Screw 25mm	4.2	1,000	10,000	270,000
TSLP4.8-22-2	Wafer Head Low Profile 4.8 x 22mm	4.8	500	12,000	288,000



PRODUCT - PAN HEAD

PHSDZ12	Pan Head Self Drill Screw 12mm	3.9	1,000	10,000	400,000
---------	--------------------------------	-----	-------	--------	---------

evolution **Contact our Sales on 08707 66 49 11**

CEMENT BOARD SCREWS

PRODUCT RANGE - CEMENTITIOUS BOARD SCREWS



Product Code	Description	Head Style	Steel Thickness (mm)	Box Qty	Carton Qty
WHL08114	4.2 x 32 500 hr Coated Hi/Lo Screw	Wafer Csk PH2	0.5-0.8	200	4,800
WHL08158	4.2 x 42 500 hr Coated Hi/Lo Screw	Wafer Csk PH2	0.5-0.8	200	4,800



WHP08114	4.2 x 32 500 hr Coated Self Drill Screw	Wafer Csk PH2	0.8-2.5	200	4,800
WHP08158	4.2 x 42 500 hr Coated Self Drill Screw	Wafer Csk PH2	0.8-2.5	200	4,800

APPLICATION

- Cement boards and sheathing to track and timber

MATERIALS

- Case hardened Carbon Steel C1022 grade

COATINGS

- Grey or Green Ruspert – 500 hours Salt Spray rating
- Paintable
- Thickness - 3μ

MASONRY SCREWS

PRODUCT RANGE



Product Code	Description	Drive	Fixture build-up (mm)	Box Qty	Carton Qty
MSCSK4.8-32-2	4.8 x 32mm Masonry Screw Countersunk Head	Phillips No2	0-7	100	3,200
MSCSK4.8-45-2	4.8 x 45mm Masonry Screw Countersunk Head	Phillips No2	5-20	100	2,400
MSCSK4.8-57-2	4.8 x 57mm Masonry Screw Countersunk Head	Phillips No2	17-32	100	3,000
MSCSK4.8-70-2	4.8 x 70mm Masonry Screw Countersunk Head	Phillips No2	30-45	100	1,600
MSCSK4.8-82-2	4.8 x 82mm Masonry Screw Countersunk Head	Phillips No2	42-57	100	1,600
MSCSK4.8-100-2	4.8 x 100mm Masonry Screw Countersunk Head	Phillips No2	60-75	100	800
MSCSK6.3-32-3	6.3 x 32mm Masonry Screw Countersunk Head	Phillips No3	0-7	100	2,400
MSCSK6.3-45-3	6.3 x 45mm Masonry Screw Countersunk Head	Phillips No3	5-20	100	2,400
MSCSK6.3-57-3	6.3 x 57mm Masonry Screw Countersunk Head	Phillips No3	17-32	100	2,400
MSCSK6.3-70-3	6.3 x 70mm Masonry Screw Countersunk Head	Phillips No3	30-45	100	1,600
MSCSK6.3-82-3	6.3 x 82mm Masonry Screw Countersunk Head	Phillips No3	42-57	100	1,600
MSCSK6.3-100-3	6.3 x 100mm Masonry Screw Countersunk Head	Phillips No3	60-75	100	800
MSCSK6.3-125-3	6.3 x 125mm Masonry Screw Countersunk Head	Phillips No3	85-100	100	800

Contact our Sales on 08707 66 49 11

MASONRY SCREWS

PRODUCT RANGE



Product Code	Description	Drive	Fixture build-up (mm)	Box Qty	Carton Qty
MSHH6.3-32-516	6.3 x 32mm Masonry Screw Slotted Hex Washer Head	5/16" AF Hex	0-7	100	1,600
MSHH6.3-45-516	6.3 x 45mm Masonry Screw Slotted Hex Washer Head	5/16" AF Hex	5-20	100	1,600
MSHH6.3-57-516	6.3 x 57mm Masonry Screw Slotted Hex Washer Head	5/16" AF Hex	17-32	100	1,600
MSHH6.3-70-516	6.3 x 70mm Masonry Screw Slotted Hex Washer Head	5/16" AF Hex	30-45	100	800
MSHH6.3-82-516	6.3 x 82mm Masonry Screw Slotted Hex Washer Head	5/16" AF Hex	42-57	100	800
MSHH6.3-100-516	6.3 x 100mm Masonry Screw Slotted Hex Washer Head	5/16" AF Hex	60-75	100	800

ACCESSORIES



Product Code	Description	To suit anchor length	Box Quantity
ED1000	Evolution Multi Purpose Drive Kit	N/A	1
SDS435180	SDS+ Drill bit with Hex Drive 4.35 x 180mm (for 4.8mm range)	Up to 100mm	1
SDS515180	SDS+ Drill bit with Hex Drive 5.15 x 180mm (for 6.3mm range)	Up to 100mm	1
SDS515205	SDS+ Drill bit with Hex Drive 5.15 x 205mm (for 6.3mm range)	Up to 125mm	1
DIBPH2	Screwdriver Insert Bit – Phillips No2 x 25mm	N/A	100
DIBPH3	Screwdriver Insert Bit - Phillips No3 x 25mm	N/A	100
MS5/16	Magnetic Drive Socket – 5/16 AF x 42mm	N/A	10

PRODUCT FEATURES & BENEFITS

- Fast and simple installation – drill through the fixture into the masonry and drive the screw home
- No plugs required – low in-place costs
- Special High/Low thread cuts into masonry and ensures high pull-out values
- The proprietary blue Ruspert coating gives added corrosion protection
- The anchor does not rely on expansion for its performance, which means that it can be used closer to edges and closer together than alternative products
- The screws can be removed if required, and even re-used
- Relatively shallow embedment means they are suitable for use in pre-stressed hollow concrete beams

MATERIALS

- Case hardened Carbon steel C1022 grade, with Blue Ruspert 500 hour Salt Spray rated coating

INSTALLATION

- Drill a hole through the fixture into the masonry at least 6mm deeper than the screw length
- Drive the screw through the fixture into the masonry
- Embedment into the masonry should be between 25mm & 42mm

evolution **Contact our Sales on 08707 66 49 11**

CONCRETE SCREWS - COUNTERSUNK HEAD

PRODUCT RANGE



Product Code	Description	Drive	Drill diameter (mm)	Minimum Drill depth through fixture (mm)	Minimum Embedment Depth (mm)	Box Qty	Carton Qty
STCS72	7.5 x 72mm Frame Fixing Screw	Torx 30	6	85	25-60	100	1,000
STCS82	7.5 x 82mm Frame Fixing Screw	Torx 30	6	95	25-60	100	1,000
STCS92	7.5 x 92mm Frame Fixing Screw	Torx 30	6	105	25-60	100	1,000
STCS102	7.5 x 102mm Frame Fixing Screw	Torx 30	6	115	25-60	100	800
STCS112	7.5 x 112mm Frame Fixing Screw	Torx 30	6	125	25-60	100	800
STCS122	7.5 x 122mm Frame Fixing Screw	Torx 30	6	135	25-60	50	700
STCS132	7.5 x 132mm Frame Fixing Screw	Torx 30	6	145	25-60	50	600
STCS142	7.5 x 142mm Frame Fixing Screw	Torx 30	6	155	25-60	50	600
STCS152	7.5 x 152mm Frame Fixing Screw	Torx 30	6	165	25-60	50	600
STCS162	7.5 x 162mm Frame Fixing Screw	Torx 30	6	175	25-60	50	500
STCS182	7.5 x 182mm Frame Fixing Screw	Torx 30	6	195	25-60	50	500
DIBTO30	Torx 30 Drive Bit - use with above					100	

DESCRIPTION

- A heavy duty self-tapping concrete screw suitable for fixing wood, metal or PVCu frames to masonry
- The screw will cut its own thread into masonry once a pilot hole has been pre-drilled

PRODUCT FEATURES & BENEFITS

- Special thread cuts into masonry and ensures high fixing strength
- Self-countersinking nibs under the head of the screws ensure flush finish
- Fast and simple installation
- Torx recess provides positive drive

MATERIALS

- Case hardened Carbon steel – zinc and yellow passivated coating

INSTALLATION

- Drill a hole through the frame into the masonry at least 13mm deeper than the screw length
- Drive the screw through the frame into the masonry
- Embedment into the masonry should be between 25mm & 60mm – dependant on hardness of material

Contact our Sales on 08707 66 49 11

METAL NAIL IN ANCHORS

PRODUCT RANGE - ALL STEEL



Product Code	Description	Flange Head Diameter (mm)	Drill Ø (mm)	Max. Fixture Thickness (mm)	Min. Embedment Depth (mm)	Box Qty	Carton Qty
MN630	M6 x 30mm All Steel Nail In	13	6	5	25	100	2,000
MN640	M6 x 40mm All Steel Nail In	13	6	15	25	100	2,000
MN650	M6 x 50mm All Steel Nail In	13	6	25	25	100	1,500
MN665	M6 x 65mm All Steel Nail In	13	6	35	30	100	1,200



EVDBZ640	M6 x 40mm All Steel Ceiling Anchor	15	6	5	35	100	2,000
EVDBZ665	M6 x 65mm All Steel Ceiling Anchor	15	6	5	35	100	1,500

PRODUCT RANGE - ALLOY (Not recommended for overhead use)



Product Code	Description	Flange Head Diameter (mm)	Drill Ø (mm)	Max. Fixture Thickness (mm)	Min. Embedment Depth (mm)	Box Qty	Carton Qty
AMN640	M6 x 40mm Alloy Metal Nail In	13	6	15	25	100	2,000
AMN650	M6 x 50mm Alloy Metal Nail In	13	6	25	25	100	1,200
AMN665	M6 x 65mm Alloy Metal Nail In	13	6	35	30	100	1,800

CBI	Ceiling Bracket 25mm x 25mm	100	1,000
-----	-----------------------------	-----	-------



DESCRIPTION

• Metal nail in anchors suitable for materials such as concrete, solid brickwork and stone. Ideal for use with angle brackets on suspended ceilings. Regulations dictate that all steel anchors should be used for overhead fixing.

PRODUCT FEATURES & BENEFITS

- Quick and easy through fixing installation
- Automatic expansion
- Time saving application due to pre-assembled nature of anchor
- High retaining power
- Non removable
- Extensive range to suit most requirements

MATERIALS


- All Steel Range – Steel, White Zinc Plated
- EVDBZ640 – Steel, Zinc and yellow passivated
- Alloy Range – Zamac with hardened steel nail

INSTALLATION

- Drill a 6mm hole in base material to depth as shown above
- Thoroughly clean all dust and waste from drilled hole
- Set anchor using a hammer by driving the nail until it is flush with the anchor collar

RECOMMENDED LOADS

Description	Drill Dia. (mm)	TENSILE		
		Concrete C20/25	Concrete Block	Solid Brick
MN630	6	0.8	N/A	0.65
MN640 MN650	6	1.25	1.25	1.1
EVDBZ640	6	0.8	N/A	0.8
AMN640 AMN650 AMN665	6	1.1	1.1	1.1

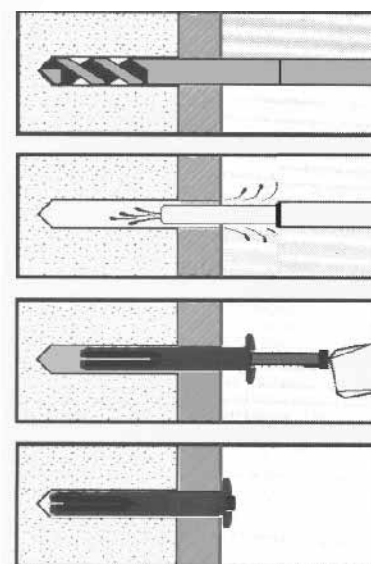

evolution **Contact our Sales on 08707 66 49 11**

WIREHANGERS

PRODUCT RANGE



Product Code	Description	Eye Diameter (mm)	Drill Dia. (mm)	Min. Drill Depth (mm)	Box Qty	Carton Qty
WH6	Wirehanger M6 x 60mm	6.5	6	35mm	100	2,000

DESCRIPTION

- All Steel load assisted anchor for use in fixing cables and wires for suspended ceiling applications

PRODUCT FEATURES & BENEFITS

- Quick and easy installation
- 6.5mm eye to ensure speed of application when attaching wire

MATERIALS

- All Steel - Zinc and yellow Passivated

INSTALLATION

- Drill a 6mm hole in base material to 35mm minimum depth
- Thoroughly clean all dust and waste from drilled hole
- Position Wirehanger in hole, tap until it can go no further
- Attach wire to eye and pull to set

RECOMMENDED LOADS

Description	Drill Diameter (mm)	Min Drill Depth (mm)	TENSILE Concrete C20/25
WH6 Wirehanger	6	35	1.0 kN

Contact our Sales on 08707 66 49 11 **evolution**

NYLON HAMMERFIX SCREWS

PRODUCT RANGE



Product Code	Description	Drill Ø (mm)	Max. Fixture Thickness (mm)	Min. Drill Depth (mm)	Box Qty	Carton Qty
HS530	M5 x 30mm Hammerfix	5	5	30	200	2,000
HS550	M5 x 50mm Hammerfix	5	25	40	200	2,000
HS640	M6 x 40mm Hammerfix	6	10	40	200	2,400
HS650	M6 x 50mm Hammerfix	6	25	40	200	2,000
HS660	M6 x 60mm Hammerfix	6	35	40	200	2,000
HS680	M6 x 80mm Hammerfix	6	55	40	200	2,000
HS860	M8 x 60mm Hammerfix	8	25	50	100	1,200
HS880	M8 x 80mm Hammerfix	8	40	50	100	1,200
HS8100	M8 x 100mm Hammerfix	8	60	50	100	900
HS8120	M8 x 120mm Hammerfix	8	80	50	100	900
HS8140	M8 x 140mm Hammerfix	8	100	50	100	900
HSC640	M6 x 40mm Hammerfix Collared	6	10	40	200	2,000

DESCRIPTION

- A simple and tough anchor for quick through-fix installation into solid masonry. Suitable for internal and external construction work

PRODUCT FEATURES & BENEFITS


- Simple and easy through fixing installation
- Countersunk head design protects the item being fixed
- Time saving application due to pre-assembled screw and plug
- Fully removable
- Extensive range to suit most requirements

MATERIALS

- Screw - steel, zinc and yellow passivated
- Sleeve - High Density Nylon

INSTALLATION

- Drill a hole through the part to be fixed according to the above table
- Insert the anchor as deep as possible
- Tap on the expansion screw to complete the setting of the anchor until the head of the screw comes into contact with the flange of the sleeve
- Alternatively use a suitable screwdriver to set the anchor by screwing the insert fully

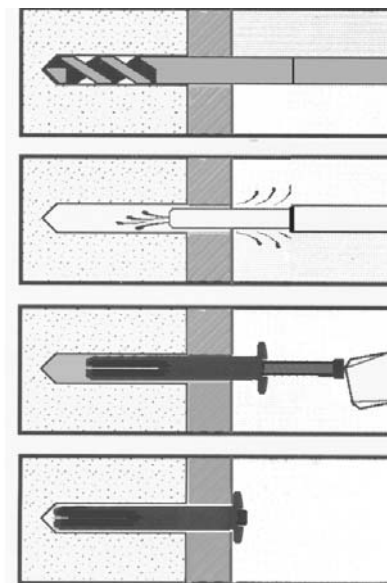

evolution Contact our Sales on 08707 66 49 11

NYLON FRAME ANCHORS



PRODUCT RANGE

Product Code	Description	Drill Ø (mm)	Max. Fixture Thickness (mm)	Min. Drill Depth (mm)	Drive Bit Required	Box Qty	Carton Qty
NFA880	M8 x 80mm Nylon Frame Anchor	8	35	50	P2	100	1,200
NFA8100	M8 x 100mm Nylon Frame Anchor	8	55	50	P2	100	800
NFA8120	M8 x 120mm Nylon Frame Anchor	8	75	50	P2	100	600
NFA1080	M10 x 80mm Nylon Frame Anchor	10	30	55	P3	100	800
NFA10100	M10 x 100mm Nylon Frame Anchor	10	50	55	P3	100	600
NFA10120	M10 x 120mm Nylon Frame Anchor	10	65	55	P3	100	600
NFA10140	M10 x 140mm Nylon Frame Anchor	10	85	55	P3	50	400
NFA10160	M10 x 160mm Nylon Frame Anchor	10	110	55	P3	50	400

DESCRIPTION

- A higher performance long shaft nylon anchor for quick through-fix installation into solid masonry. Suitable for internal and external construction work

PRODUCT FEATURES & BENEFITS


- Simple and easy through fixing installation
- Countersunk head design protects the item being fixed
- Fully removable
- Extensive range to suit most requirements
- Fins prevent anchor from rotating inside drilled hole

MATERIALS

- Screw - steel, zinc and yellow passivated
- Sleeve - High Density Nylon

INSTALLATION

- Drill a hole through the part to be fixed according to the above tables
- Clean out hole
- Position the anchor in the hole through the part to be fixed and tap with hammer until the collar of the anchor makes contact with the part to be fixed
- Screw until the head of the anchor is flush with the collar

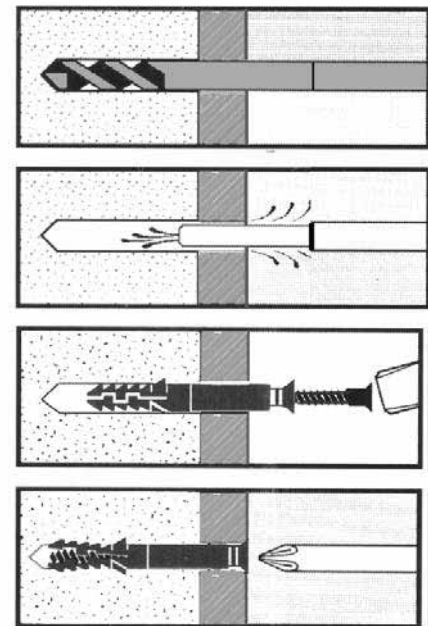

Contact our Sales on 08707 66 49 11 **evolution**

NYLON WINDOW FRAME ANCHORS

PRODUCT RANGE



Product Code	Description	Drill Ø (mm)	Max. Fixture Thickness (mm)	Min. Drill Depth (mm)	Drive Bit Required	Box Qty	Carton Qty
WFA8100	M8 x 80mm Window Frame Anchor	8	60	50	P2	100	1,200
WFA8120	M8 x 100mm Window Frame Anchor	8	80	50	P2	100	800
WFA10100	M10 x 100mm Window Frame Anchor	10	50	60	P3	100	600
WFA10120	M10 x 120mm Window Frame Anchor	10	70	60	P3	100	600
WFA10140	M10 x 140mm Window Frame Anchor	10	90	60	P3	100	600

DESCRIPTION

- A high performance nylon anchor for quick installation of PVCu, Wood and Aluminium frames into solid masonry. Suitable for internal and external construction work

PRODUCT FEATURES & BENEFITS


- Simple and easy through fixing installation
- Expansion cone for controlled expansion where required
- Countersunk head design protects the item being fixed
- Fully removable
- Extensive range to suit most requirements

MATERIALS

- Screw - steel, zinc and yellow passivated
- Sleeve - High Density Nylon

INSTALLATION

- Drill a hole through the part to be fixed according to the above table
- Clean out hole
- Position the anchor in the hole through the part to be fixed
- Align frame and screw until the head of the anchor is flush with the collar

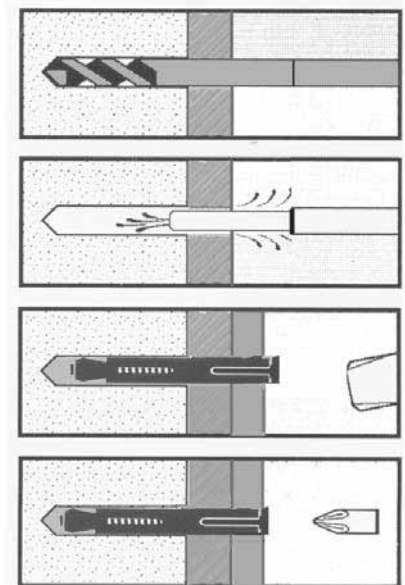

evolution Contact our Sales on 08707 66 49 11

DECKING SCREWS

PRODUCT RANGE



Product Code	Description	Drive	Diameter (mm)	Box Qty	Carton Qty
DS-SS50	Decking Screw Stainless Steel 4.2 x 50mm	R2 Square	4.2	200	6,000
DS-SS63	Decking Screw Stainless Steel 4.2 x 63mm	R2 Square	4.2	200	4,000

PRODUCT RANGE



Product Code	Description	Drive	Diameter (mm)	Box Qty	Carton Qty
DSFHC40	Decking Screw 4.2 x 40mm	R2 Square	4.2	200	8,000
DSFHC50	Decking Screw 4.2 x 50mm	R2 Square	4.2	200	6,000
DSFHC63	Decking Screw 4.2 x 63mm	R2 Square	4.2	200	4,000
DSFHC75	Decking Screw 4.2 x 75mm	R2 Square	4.2	200	3,200
DSFHC90	Decking Screw 4.2 x 90mm	R2 Square	4.2	200	2,400

DIBSR	R2 Square Drive Insert Bit for above	100 (box quantity)
-------	--------------------------------------	--------------------



APPLICATION

- Designed for fixing timber decking and fencing

PRODUCT FEATURES & BENEFITS

- Flat head with self-countersinking nibs gives a flush, clean and attractive countersink that locks the screw in tight
- 'Stick-fit' square socket drive recess reduces dropped or misaligned screws providing fast and efficient fastening
- Free square drive bit in every box of 200 screws
- Deep coarse thread configuration ensures low-torque installation with exceptional draw-down for maximum holding power
- Made from large diameter root wire for greater sheer strength
- Super sharp point grabs on contact and provides rapid advancement
- Excellent capability in all types of timber and new generation wood composites
- Proprietary corrosion resistant 1,000 hour salt spray and K.S.L.™ green coating for all-weather outdoor applications. Resistant to salt, acid, alkali, corrosive gas and cathodic corrosion, as well as being heat resistant

MATERIALS AND COATINGS

- Steel with 1,000 hour Salt Spray tested Green K.S.L.™ coating
- Tested for use in ACQ timber treatments in accordance with JIS 1570

Contact our Sales on 08707 66 49 11

WOODSCREWS – TWINFAST™



PRODUCT RANGE - FLAT HEAD COUNTERSUNK, POZI DRIVE, TWINFAST, BRIGHT ZINC PLATED

Product Code	Description	Box Qty	Carton Qty
WS0412	Zinc Woodscrew #4 x 1/2"	200	12,600
WS0458	Zinc Woodscrew #4 x 5/8"	200	12,600
WS0434	Zinc Woodscrew #4 x 3/4"	200	12,600
WS041	Zinc Woodscrew #4 x 1"	200	12,600
WS0612	Zinc Woodscrew #6 x 1/2"	200	12,600
WS0658	Zinc Woodscrew #6 x 5/8"	200	12,600
WS0634	Zinc Woodscrew #6 x 3/4"	200	12,600
WS061	Zinc Woodscrew #6 x 1"	200	12,600
WS06114	Zinc Woodscrew #6 x 1 1/4"	200	8,000
WS06112	Zinc Woodscrew #6 x 1 1/2"	200	4,200
WS062	Zinc Woodscrew #6 x 2"	200	4,200
WS0734	Zinc Woodscrew #7 x 3/4"	200	12,600
WS071	Zinc Woodscrew #7 x 1"	200	12,600
WS07114	Zinc Woodscrew #7 x 1 1/4"	200	4,200
WS07112	Zinc Woodscrew #7 x 1 1/2"	200	4,200
WS0834	Zinc Woodscrew #8 x 3/4"	200	12,600
WS081	Zinc Woodscrew #8 x 1"	200	8,000
WS08114	Zinc Woodscrew #8 x 1 1/4"	200	8,000
WS08112	Zinc Woodscrew #8 x 1 1/2"	200	4,200
WS08134	Zinc Woodscrew #8 x 1 3/4"	200	4,200
WS082	Zinc Woodscrew #8 x 2"	200	3,600
WS08212	Zinc Woodscrew #8 x 2 1/2"	200	2,400
WS083	Zinc Woodscrew #8 x 3"	200	4,200



Contact our Sales on 08707 66 49 11

WOODSCREWS – TWINFAST™

PRODUCT RANGE

Product Code	Description	Box Qty	Carton Qty
WS101	Zinc Woodscrew #10 x 1"	200	8,000
WS10112	Zinc Woodscrew #10 x 1½"	200	3,600
WS102	Zinc Woodscrew #10 x 2"	200	3,600
WS10212	Zinc Woodscrew #10 x 2½"	200	2,400
WS103	Zinc Woodscrew #10 x 3"	200	2,400
WS10312	Zinc Woodscrew #10 x 3½"	100	1,800
WS104	Zinc Woodscrew #10 x 4"	100	1,800
WS12112	Zinc Woodscrew #12 x 1½"	200	3,600
WS122	Zinc Woodscrew #12 x 2"	200	2,400
WS12212	Zinc Woodscrew #12 x 2½"	200	2,400
WS123	Zinc Woodscrew #12 x 3"	200	2,400
WS12312	Zinc Woodscrew #12 x 3½"	100	1,800
WS124	Zinc Woodscrew #12 x 4"	100	2,100

APPLICATION

- Designed for use in a hardwood environment. Will not split, pop or crack wood. Mar surfaces, bend or overdrive

PRODUCT FEATURES & BENEFITS

- Clean, smooth, low-torque installation
- Deep Pozi-drive recess guarantees fast efficient fastening
- Countersunk head protects the item being fixed

COATING

- Electro zinc plated

Contact our Sales on 08707 66 49 11

SDS PLUS DRILL BITS

PRODUCT RANGE

Product Code	Description	Working Length (mm)
SDS4160	4 X 160mm SDS + Drill Bit	100
SDS5110	5 X 110mm SDS + Drill Bit	50
SDS5160	5 X 160mm SDS + Drill Bit	100
SDS55110	5.5 X 110mm SDS + Drill Bit	50
SDS55160	5.5 X 160mm SDS + Drill Bit	100
SDS6110	6 X 110mm SDS + Drill Bit	50
SDS6160	6 X 160mm SDS + Drill Bit	100
SDS6210	6 X 210mm SDS + Drill Bit	150
SDS6260	6 X 260mm SDS + Drill Bit	200
SDS65110	6.5 X 110mm SDS + Drill Bit	50
SDS65160	6.5 X 160mm SDS + Drill Bit	100
SDS65260	6.5 X 260mm SDS + Drill Bit	200
SDS7160	7 X 160mm SDS + Drill Bit	100
SDS7260	7 X 260mm SDS + Drill Bit	200
SDS8160	8 X 160mm SDS + Drill Bit	100
SDS8210	8 X 210mm SDS + Drill Bit	150
SDS8260	8 X 260mm SDS + Drill Bit	200
SDS10160	10 X 160mm SDS + Drill Bit	100
SDS10210	10 X 210mm SDS + Drill Bit	150
SDS10260	10 X 260mm SDS + Drill Bit	200
SDS10460	10 X 460mm SDS + Drill Bit	400
SDS12160	12 X 160mm SDS + Drill Bit	100
SDS12210	12 X 210mm SDS + Drill Bit	150
SDS12260	12 X 260mm SDS + Drill Bit	200
SDS12460	12 X 460mm SDS + Drill Bit	400




evolution **Contact our Sales on 08707 66 49 11**

SDS PLUS DRILL BITS

PRODUCT RANGE

Product Code	Description	Working Length (mm)
SDS14260	14 X 260mm SDS + Drill Bit	200
SDS14460	14 X 460mm SDS + Drill Bit	400
SDS16260	16 X 260mm SDS + Drill Bit	200
SDS16460	16 X 460mm SDS + Drill Bit	400
SDS18260	18 X 260mm SDS + Drill Bit	200
SDS18460	18 X 460mm SDS + Drill Bit	400
SDS20260	20 X 260mm SDS + Drill Bit	200
SDS20460	20 X 460mm SDS + Drill Bit	400
SDS22260	22 X 260mm SDS + Drill Bit	200
SDS22460	22 X 460mm SDS + Drill Bit	400
SDS25260	25 X 260mm SDS + Drill Bit	200
SDS25460	25 X 460mm SDS + Drill Bit	400

SDS435180	4.35 x 180mm SDS+ Drill Bit with Hex Shank Drive for Evodrive Kit	100
SDS515180	5.15 x 180mm SDS+ Drill Bit with Hex Shank Drive for Evodrive Kit	100
SDS515205	5.15 x 205mm SDS+ Drill Bit with Hex Shank Drive for Evodrive Kit	125

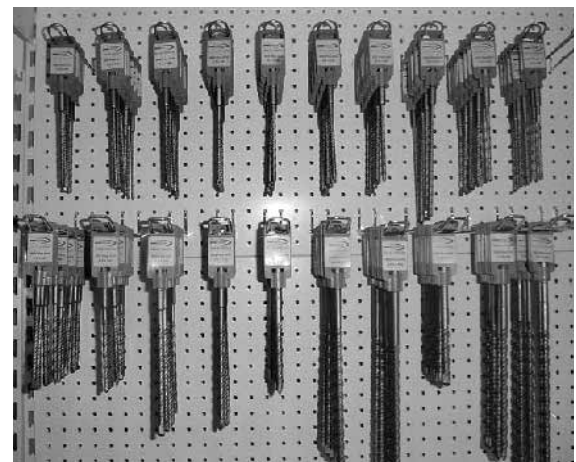

DESCRIPTION

- A high quality, twin-fluted SDS+ Carbide drill bit for the rapid drilling of holes in masonry

PRODUCT FEATURES & BENEFITS

- Twin fluted design provides rapid removal of drilled material
- Copper brazed tips for extra durability
- Supplied on individual hangers for easy display
- Extensive range to suit the Evolution range of fixings

Contact our Sales on 08707 66 49 11

MASONRY DRILL BITS

PRODUCT RANGE

Product Code	Description	Pack Quantity
CDB316312	3/16" x 3-1/2" Carbide Tipped Masonry Drill Bits	10
CDB316412	3/16" x 4-1/2" Carbide Tipped Masonry Drill Bits	10
CDB316512	3/16" x 5-1/2" Carbide Tipped Masonry Drill Bits	10
CDB532312	5/32" x 3-1/2" Carbide Tipped Masonry Drill Bits	10
CDB532412	5/32" x 4-1/2" Carbide Tipped Masonry Drill Bits	10
CDB532512	5/32" x 5-1/2" Carbide Tipped Masonry Drill Bits	10

SCREWDRIVER INSERT BITS

PRODUCT RANGE

Product Code	Description	Length (mm)	Pack Quantity
DIBPH1	Screwdriver Insert Bit – Phillips 1	25	100
DIBPH2	Screwdriver Insert Bit – Phillips 2	25	100
DIBPH3	Screwdriver Insert Bit – Phillips 3	25	100
DIBDSP	Screwdriver Insert Bit – Drywall	25	100
DIBPO1	Screwdriver Insert Bit – Pozi 1	25	100
DIBPO2	Screwdriver Insert Bit – Pozi 2	25	100
DIBPO3	Screwdriver Insert Bit – Pozi 3	25	100
DIBSR	Screwdriver Insert Bit – R2 Square Drive	25	100
DIBTO30	Screwdriver Insert Bit – Torx 30	25	100





Contact our Sales on 08707 66 49 11

EXTENDED DRILL INSERT BITS

PRODUCT RANGE

Product Code	Description	Length (mm)	Pack Quantity
PH2120	PH Drill Insert Bit 2	120	10
PH2141	PH Drill Insert Bit 2	141	10
PH2150	PH Drill Insert Bit 2	150	10
R2120	Square Drive Drill Insert Bit	120	10
R2141	Square Drive Drill Insert Bit	141	10
R2150	Square Drive Drill Insert Bit	150	10

ACCESSORIES

PRODUCT RANGE

Product Code	Description	Length (mm)	Pack Quantity
MS5/16	Magnetic Drive Socket – 5/16 AF x 42mm	42	10
MES5/16	Magnetic Drive Socket – 5/16 AF x 65mm	65	10
MBH1060	Magnetic Bit Holder – 10 x 60mm	60	10
ED1000	Evolution Multi Purpose Drive Kit		1
SDS435180	4.35 x 180mm SDS+ Drill Bit with Hex Shank Drive for Evodrive Kit – working length 100mm		1
SDS515180	5.15 x 180mm SDS+ Drill Bit with Hex Shank Drive for Evodrive Kit - working length 100mm		1
SDS515205	5.15 x 205mm SDS+ Drill Bit with Hex Shank Drive for Evodrive Kit – working length 125mm		1
TKG	TKSE 2500Q Tek Gun		1
EVIGUN400	Evolution Application Gun 400ml 11" Skeleton		1
EVIGUN900	Evolution Application Gun 900ml 14.5" Skeleton		1
DWG	DWSE4000MQ Collated 110v Screw Gun		1

Contact our Sales on 08707 66 49 11

SELF ADHESIVE FIBREGLASS TAPE

PRODUCT RANGE

Product Code	Description	Mesh Size	Roll length	Weight (g/m ²)	Box Qty	Pallet Qty)
SAT590	Staygrip Self-adhesive Fibreglass Tape	250mm	90 metres	60	24 rolls	1080 rolls

DESCRIPTION

- A self adhesive fibreglass mesh tape for covering joints in plasterboard prior to finishing

PRODUCT FEATURES & BENEFITS

- High performance impact adhesive coated providing quick and easy application and smooth finished joints
- Single weave fibreglass provides greater drywall joint strength and crack resistance
- Shrink wrapped to prevent ambient moisture affecting adhesive



FIBREGLASS MESH

PRODUCT RANGE

Product Code	Description	Mesh Size	Roll length	Weight (g/m ²)	Box Qty	Pallet Qty
FM50	Fibreglass Mesh 50m x 1m	2.5 x 2.5mm	50 metres	60	4 rolls	96 rolls

DESCRIPTION

- A fibreglass yarn deeply treated with an alkaline resistant process

PRODUCT FEATURES & BENEFITS

- For reinforcing drywall render and sprayed-on coatings
- High strength and durability
- Ideal for roof water-proofing reinforcement
- Suitable for a wide variety of tasks including mosaic tiling
- Alkaline Resistant



Density (coated)	60 g/m ²	Yarn Tex-Warp	50
Density (uncoated)	50 g/m ²	Yarn Tex-Weave	68
Roll Weight	3kg	Tensile Strength Crosswise	≥ 500 N/5cm x 20cm
Woven Structure	Leno	Tensile Strength Lengthwise	≥ 650 N/5cm x 20cm
Cloth Thickness (coated)	0.22mm	Content of Resin	≥ 18%

evolution Contact our Sales on 08707 66 49 11

FIRE AND SMOKE BARRIER

PRODUCT RANGE

Product Code	Description	Fire	Roll Length	Colour
TBSR200	Evolution Fire and Smoke Barrier 20m x 1.5m	Up to 2 hours	20m	Brown
TBSR560	Evolution Fire and Smoke Barrier 20m x 1.75m	Up to 2 hours	20m	Brown

DESCRIPTION

- Evolution Fire and Smoke Barrier is made from long strands of Basalt rock that are spun into threads and then woven into a curtain. The product is made from chemically inert natural materials that will outlast the building.

PRODUCT FEATURES & BENEFITS

- A natural product - environmentally friendly
- Flexible, lightweight - easy to handle and install
- Safe - non fibrous, non irritant
- Inexpensive - the lowest cost solution

INTUMESCENT ACOUSTIC SEALANT

PRODUCT RANGE

Product Code	Description	Fire Rating	Acoustic rating (Double Seal)	Acoustic rating (single Seal)	Colour	Box Qty	Pallet Qty
EVIA310	Evolution Intumescent & Acoustic Acrylic Sealant 310ml	Up to 4 hours	Up to 48dB	Up to 46dB	White	12	1,536
EV1A900	Evolution Intumescent & Acoustic Up to Acrylic Sealant 900ml	Up to 4 hours	Up to 48db	Up to 48db	White	9	576

DESCRIPTION

- A one part emulsion sealant designed to resist the passage of both fire and sound

PRODUCT FEATURES AND BENEFITS

- In normal use it will remain flexible enough to retain the sound reduction index of a structure
- In the event of fire it will intumesce and form a char, sealing the gap for up to 4 hours
- Over-paintable when fully cured
- Water and UV resistant when fully cured
- Tack free in 15 minutes
- Curing time is 1.5mm per 24 hours

APPLICATION

- Use rubber gloves and protection to avoid skin and eye contact
- Ensure all surfaces are free from grease and dust
- Use masking tape to ensure a neat line
- Tool the joint within five minutes of application to give a good contact between the sealant and substrate
- Remove masking tape immediately after tooling



USAGE GUIDE

Product Code	Description	Box Quantity
EVIGUN400	Evolution Application Gun 400ml 11" Skeleton	1
EVIGUN900	Evolution Application Gun 900ml 14.5" Skeleton	1

JOINT SIZE	LINEAR METRES PER CARTRIDGE
6 X 10mm	5.2
10 x 10mm	3.1
15 x 15mm	1.4
20 x 15mm	1.0
30 x 15mm	0.7